

HeatSink™

TRUE-CYCLING™ REFRIGERATED
COMPRESSED AIR DRYERS

75–2,400 SCFM



**Independently Verified
Performance** (200-1000 scfm models)

CFX® *Stainless Steel
Heat Exchangers*

HeatSink™

True-Cycling™ Refrigerated Compressed

ZEKS Compressed Air Solutions Meets The Needs Of Compressed Air Users

Compressed air is a versatile energy resource, ideal for many production processes, for powering tools and equipment, and actuating valves, among other uses. For processes and devices to operate at peak efficiency, the compressed air supply must be clean and dry. Contaminants present at the intake of the air compressor can effect the operation of compressed air equipment. The compression process causes concentrations of water, compressor lubricant and air-borne particulate to increase to levels that can damage tools, increase maintenance requirements or spoil finished product. ZEKs HeatSink™ dryers economically and reliably dry compressed air, thereby ensuring efficient operation of downstream equipment and processes.

Energy Savings – The True-Cycling™ Advantage

Common manufacturing practices, process machinery cycling and changing production requirements all result in variable compressed air volume use. This, combined with periods of low ambient and inlet air temperatures, results in reduced load on an air dryer. ZEKs HeatSink™ dryers are designed to take advantage of these factors to reduce the cost of drying compressed air. HeatSink™ dryers use a refrigeration system to cool a thermal mass, which in turn cools the compressed air that flows through the dryer. Cooling causes moisture and contaminants present in the air to condense, enabling removal in a high efficiency separator within the dryer. Because HeatSink™ dryers have the capacity to store cool energy in the thermal mass fluid, the refrigeration system automatically cycles off during periods of low demand while the dryer continues to remove moisture and contaminants from the air stream. This True-Cycling™ operation typically consumes far less energy than the equivalent non-cycling dryer that operates the refrigeration system continuously.

The Original Energy Saving Compressed Air Dryer:

- ***Energy Savings As High As 80%*** - resulting from True-Cycling™ operation in variable moisture load conditions (see Annual Energy Savings Chart)
- ***99% Moisture Separation Efficiency*** - provided by the exclusive ZEKs moisture separator design
- ***Consistent Dew Point*** - dryer components are sized to enable consistent dew point at full or partial moisture loading in all industrial environments
- ***Reliable Digital Performance Control*** - enhanced user interface for dryer performance monitoring and adjustment
- ***CFX®-Based Precooler/Reheater*** - Conditions the compressed air to minimize energy consumption and eliminate pipe sweating
- ***Rated Performance Even In Elevated Ambient Temperatures*** - resulting from generously sized refrigeration condenser
- ***Optimum Cycling Efficiency*** - from active circulation of thermal storage media


Air Dryers

The Standard of Excellence For Heat Exchanger Design


ZEKS patented CFX[®] stainless steel heat exchangers, engineered exclusively for compressed air drying, include industry-leading low pressure drop and a high heat transfer coefficient. A multi-path flow area that is 3-5 times that of the equivalent copper tube exchanger combined with continuous self-cleaning action minimize fouling potential. These corrosion resistant stainless steel exchangers are used in both air and refrigeration circuits. All-welded CFX[®] Corrugated, Folded heat exchangers provide durability in environments where copper or other metals are not suitable.



- **100% Stainless Steel Construction** - No copper brazed joints that compromise the integrity of the exchanger
- **Industry-Leading Low Pressure Drop** - Minimizes energy consumption and the need for greater compressor horsepower
- **Less Prone To Fouling Than Copper Or Aluminum Exchangers** - Maintains optimal performance
- **ZEKS Exclusive 10-Year Warranty** - A testament to the durability and efficiency of this robust component

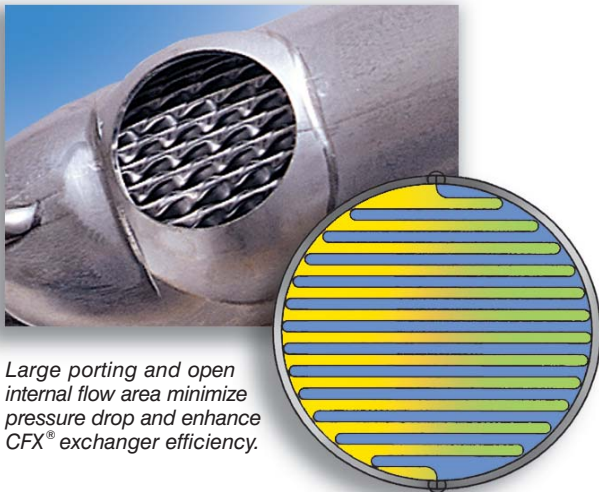

Large porting and open internal flow area minimize pressure drop and enhance CFX[®] exchanger efficiency.

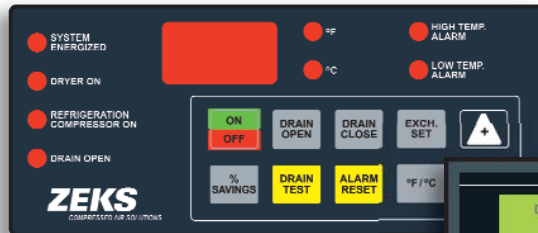

Compustat - Standard on 200-800



DPC - Standard on 1000-2400, optional on 75-150

Electronic Performance Control

HeatSink[™] dryer operation is automatically controlled to optimize air treatment and manage energy consumption. In addition, both the Compustat and DPC controllers enable the user to adjust the operating parameters based on specific application requirements, optimizing energy usage.

Compustat – Digital controller standard on 200-800 models. Includes LED display to communicate operating status and energy savings.

DPC Controller – Optional on 75-150 models. Enhanced version standard on 1000-2400 models. Includes backlit LCD to communicate operating status and refrigeration system parameters.

DPC Plus Controller – Optional on 200-2400 models. Provides all the features of the DPC Controller, with the addition of air temperature and pressure displays.

Display of:	75-150	Dryer Model 200-800	1000-2400
• Chiller Temperature	0	S	S
• % Energy Savings	0	S	S
• Refrigerant Suction Pressure	S (Gauge)	+	S
• Refrigerant Suction Temperature	NA	+	S
• Refrigerant Discharge Pressure	NA	+	S
• Dryer Compressor Running Time	0	+	S
• Dryer Running Time	0	+	S
• Diagnostic Memory	0	+	S
• Inlet Air Pressure	NA	+	+
• Outlet Air Pressure	NA	+	+
• Inlet Air Temperature	NA	+	+
• Outlet Air Temperature	NA	+	+
Condensate Drain Time Adjustment	0	S	S
Automatic Dryer RESTART	0	S	S
Remote START/STOP-Ready	0	S	S
Remote Alarm Contact	0	S	S
MODBUS Communication-Ready	0	+	S

S - Standard feature with either Compustat or DPC

0 - Option provided by DPC

NA - Not Applicable

+ - Included with DPC Plus Option

Standard Features:

- Stainless Steel CFX® Heat Exchangers
- Fully Hermetic Refrigeration Compressor
- High Efficiency Moisture Separator
- Electronic Performance Control (optional on 75-150)
- Timed Electric Condensate Drain
- Water Cooled or Air Cooled Condensers (air cooled only on 75-150)
- **Environmentally Friendly R-404 Refrigerant**
- Thermal Mass Circulation Pump
- NEMA 1 Electrics
- Full Powder-Coated Cabinet
- Galvanized Internal Structure

Optional Features:

- Digital Display of Compressed Air Inlet and Outlet Temperatures and Pressures (200-2400 only)
- Complete Stainless Steel Air Circuit
- Prefilter and Afterfilter To Meet Application Requirements
- CME™ Cold Mist Eliminator – 99% removal of air compressor lubricant carryover (available on 200-400)
- High Condensate Level Alarm (200-2400 only)
- Refrigeration Condenser Filter
- NEMA 4/12 Electrics
- No Air Loss Drain

Exclusive Warranty

In addition to the standard warranty on all HeatSink™ dryers, the refrigeration compressor is warranted for five years and the CFX® Heat Exchangers for ten years.

Refer to ZEKs Product Warranty Policies and Procedures.



Independently Verified Performance!

Through participation in the Compressed Air and Gas Institute (CAGI) Performance Verification Program, actual performance and energy consumption of 200-1000 scfm ZEKs HeatSink™ dryers have been independently validated against CAGI Data Sheets. Visit www.zeks.com to view ZEKs refrigerated dryer Data Sheets.



HeatSink™

REFRIGERATED COMPRESSED AIR DRYERS
75 – 2,400 scfm

Reliability. Efficiency. Innovation.



Annual Energy Savings

The example below calculates the annual energy savings of a HeatSink™ dryer compared to a non-cycling design. The factors can be replaced with those of any compressed air system.

A. Determine Maximum Capacity of The Dryer

Assume a maximum capacity of 1,000 scfm for this example.

B. Determine Weekly Compressed Air Volume

Multiply the number of hours worked per week on all shifts times the compressed air volume (scfm x 60 min.) used on each shift. Total all shift numbers to determine the actual compressed air volume used per week:

Shift	Hours	(60 min.)	scfm	Air Volume
FIRST	35	x 60	x 800	= 1,680,000
SECOND	35	x 60	x 600	= 1,260,000
THIRD	35	x 60	x 400	= 840,000
SATURDAY	7	x 60	x 200	= 84,000
Weekly Compressed Air Volume				3,864,000

C. Calculate Weekly Air Treatment Potential of The Dryer

Multiply the total number of hours per week (168 assuming the equipment is ON, 24/7) times the maximum capacity of the dryer:

$$\text{Weekly Air Treatment Potential} = 168 \text{ hrs.} \times 1,000 \text{ scfm} \times 60 \text{ min.} = 10,080,000$$

D. Calculate The Plant Operation Factor

Divide the total compressed air volume used per week by the total weekly air treatment potential to determine the plant operation factor:

$$\text{Plant Operation Factor} = \frac{3,864,000}{10,080,000} = .383$$

E. Select Ambient Air Temperature Reduction Factor

The factor varies based on geographic location and takes into account the impact of lower ambient temperatures on energy consumption. Typical factors are:

Northern US Climate –.24 Central US Climate –.31 Southern US Climate –.34

F. Calculate Utilization Factor

This incorporates all of the above:

$$\text{Plant Operation Factor} \times \text{Ambient Air Temperature Reduction Factor}$$

If we assume the plant is in the Southern US, the Utilization Factor will be:

$$\text{Utilization Factor} = .383 \times .34 = .13 \text{ (13\%)}$$

G. Estimate Annual Savings

Refer to the following table for a 1,000 scfm dryer and interpolate between a 10% and 20% utilization factor:

Estimated Annual Savings (\$) From True-Cycling Operation* (Based on \$.10/kWh)

Dryer Size (scfm)	10%	20%	30%	Utilization Factor		
				40%	50%	60%
75HSG	520	451	383	314	245	177
100HSG	825	740	656	571	487	402
125HSG	994	876	758	640	521	403
150HSG	999	886	773	659	546	433
200HSG	1345	1200	1054	908	762	617
250HSG	1218	1042	867	691	515	339
300HSG	1633	1410	1187	964	741	518
400HSG	2767	2484	2200	1917	1633	1349
500HSF	2752	2356	1960	1564	1168	772
600HSF	3522	3100	2678	2255	1833	1411
700HSF	4210	3704	3197	2690	2183	1676
800HSF	4334	3765	3196	2626	2057	1488
1000HSF	4914	4135	3355	2575	1796	1016
1200HSF	7402	6482	5563	4643	3723	2803
1600HSF	8751	7604	6456	5309	4161	3013
2000HSF	10862	9636	8410	7183	5957	4730
2400HSF	12807	11423	10039	8655	7271	5887

*Consult factory for calculation details

Results shown for air cooled models

Heat load on refrigerated compressed air dryers is based on the combination of inlet air flow volume, inlet air temperature, ambient air temperature, and compressed air pressure. Of these, inlet air flow volume (scfm) and inlet air temperature have the greatest effect. Even a slight reduction of inlet air temperature will greatly reduce the heat load on a dryer. Dryer model selection is based on capacity sufficient to handle the heat load during the hottest months of the year. Cycling operation provides the greatest way to realize energy savings as inlet air temperature drops.

HeatSink™

REFRIGERATED
COMPRESSED AIR DRYERS

Reliability
Efficiency
Innovation

HeatSink™ Sizing and Selection

HeatSink™ dryer performance is rated per ISO 7183, Table 2, Option A2, for air with 38°F pressure dew point (PDP) at the following conditions: 100°F inlet air temperature; 100 psig inlet air pressure; 100°F ambient air temperature. Select a model that has the required treatment capacity (scfm) from the Technical Specifications Chart below.

For applications that deviate from the standard rating conditions, use the following Correction Factors to select a model that will provide 38°F PDP (selection example provided):


Dryer Selection Example		Inlet Air Temperature	Correction Factor	Inlet Air Pressure	Correction Factor	Ambient Air Temperature	Correction Factor
• Air Volume Requirement:	375 scfm	80°F	.61	50 psig	1.29	80°F	.80
• Inlet Air Temperature:	110°F	90°F	.79	75 psig	1.10	90°F	.89
• Inlet Air Pressure:	150 psig	100°F	1.00	100 psig	1.00	100°F	1.00
• Ambient Air Temperature:	90°F	110°F	1.23	150 psig	0.86	110°F	1.16
		120°F	1.51	250 psig	.79	120°F	1.30

With the correction factors selected, corrected scfm can be calculated:

$$1.23 \times .86 \times .89 \times 375 \text{ scfm} = 353 \text{ scfm corrected}$$

Select the HeatSink™ model that matches or exceeds the corrected treatment capacity (scfm). For the example given, it is a model 400HSG delivering 38°F PDP.

Overall dimensions indicated. Air, electric service, and drain connection configurations vary per model. Contact factory for details.

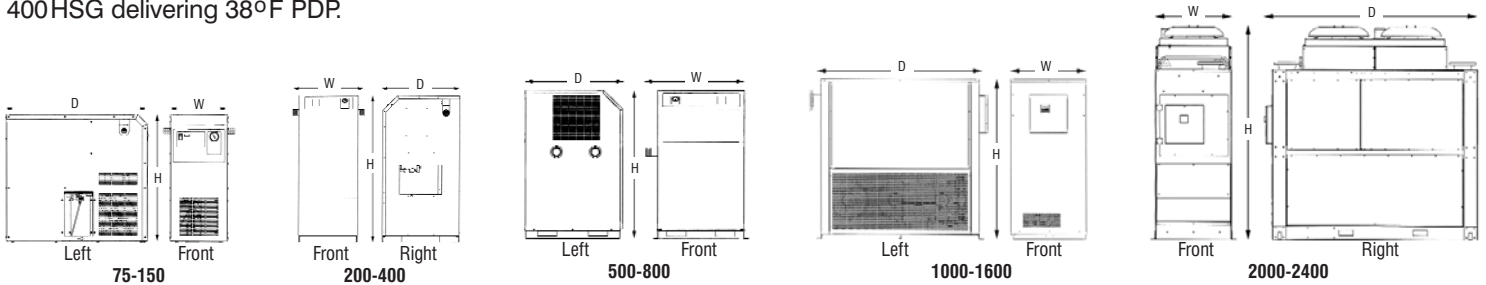

Technical Specifications

MODEL	CAPACITY* SCFM 38°F	PRESSURE DROP**	DIMENSIONS			SHIP WT.		AIR CONNECT IN/OUT	DRAIN CONNECT FPT	REFRIG COMP		OPERATING KW***		REFRIG TYPE	MAX WORKING PRESSURE	VOLTAGES
			W IN.	D IN.	H IN.	AIR COOL LBS.	WATER COOL LBS.			AIR COOL HP	WATER COOL HP	AIR COOL	WATER COOL			
75HSG	75	1.5	14	35	31	265	NA	1" MPT	1/4"	.4	NA	.78	NA	R404	300 psig	115-1-60 208/230-1-60 220-1-50
100HSG	100	2.1	14	35	31	265	NA	1" MPT	1/4"	.5	NA	.96	NA	R404	300 psig	
125HSG	125	1.9	14	35	31	300	NA	1 1/2" MPT	1/4"	.8	NA	1.35	NA	R404	300 psig	
150HSG	150	2.6	14	35	31	300	NA	1 1/2" MPT	1/4"	1.0	NA	1.29	NA	R404	300 psig	
200HSG	200	1.6	28	30	58	620	540	1 1/2" MPT	1/4"	1.3	1.3	2.1	1.06	R404	300 psig	208/230-3-60 220-3-50 460-3-60 380-3-50 575-3-60
250HSG	250	2.7	28	30	58	670	570	1 1/2" MPT	1/4"	1.5	1.5	2.3	1.39	R404	300 psig	
300HSG	300	2.1	28	30	58	735	630	2" MPT	1/4"	2.0	2.0	2.8	1.65	R404	300 psig	
400HSG	400	2.9	28	30	58	745	670	2" MPT	1/4"	2.5	2.5	3.3	2.19	R404	300 psig	
500HSF	500	2.9	42	40	62	1105	1120	3" MPT	1/4"	3.5	3.5	4.6	2.80	R404	300 psig	208/230-3-60 220-3-50 460-3-60 380-3-50 575-3-60
600HSF	600	3.0	42	40	62	1275	1270	3" MPT	1/4"	4.0	4.0	5.0	3.14	R404	300 psig	
700HSF	700	2.7	42	40	62	1320	1300	3" MPT	1/4"	4.5	4.5	6.1	3.58	R404	300 psig	
800HSF	800	2.9	42	40	62	1415	1300	3" MPT	1/4"	5.0	5.0	6.7	4.16	R404	300 PSIG	
1000HSF	1,000	2.4	32	72	69	2315	2355	4" FLG	1/4"	6.5	5.0	8.9	6.9	R404	220 psig	(230-3-60 not available on the 2000-2400 models)
1200HSF	1,200	3.1	32	72	69	2435	2435	4" FLG	1/4"	8.0	6.0	10.5	6.9	R404	220 psig	
1600HSF	1,600	3.3	32	72	69	2785	2615	4" FLG	1/4"	10.5	8.0	13.1	7.7	R404	220 psig	
2000HSF	2,000	3.5	32	91	90.68‡	3925	3925	6" FLG	1/4"	13.0	10.5	13.5	10.4	R404	220 psig	
2400HSF	2,400	3.5	32	91	90.68‡	4150	4015	6" FLG	1/4"	13.0	10.5	15.8	11.4	R404	220 psig	

* Performance data obtained as per ISO 7183, Table 2, Option A2. Pressure dew point at 100 psig inlet air pressure, 100°F inlet air temperature, 100°F ambient air temperature.

** Pressure drop ± .5 psi

*** Average kilowatts per hour of dryer operation at full rated capacity. 200-400 scfm units equipped with CME™ Cold Mist Eliminator limited to drain rating of 230 psi.

‡ Air cooled dimension. Water cooled dimension 76.12"

NEMA 1 electrical enclosures standard.

Dimensions subject to change without notice.

Standard 75-800 scfm models ETL-Certified
1000-2400 models UL 508 Panels.

NA indication = Not Applicable

Protected under U.S. Patent Nos. 6,186,223 and 6,244,333

HeatSink™

REFRIGERATED
COMPRESSED AIR DRYERS

75 – 2,400 scfm



ZEKS

COMPRESSED AIR SOLUTIONS®

1302 Goshen Parkway
West Chester, PA 19380

Phone: 610-692-9100 800-888-2323

Fax: 610-692-9192

Web: www.zeks.com